
CCS 900 Ultro Conference System Efficient meeting technology





Designed for aesthetic, acoustic and functional perfection.

- ► Innovative and authentic European design
- Unique, patent-pending "Possible-To-Speak" indicator
- ► Excellent speech intelligibility with digital acoustic feedback suppression (Optional)
- ► Complete meeting control
- ► Easy to use and easy to install
- Future-proof system expendability
- ► Mobile or permanent installation
- ▶ 3 years warranty

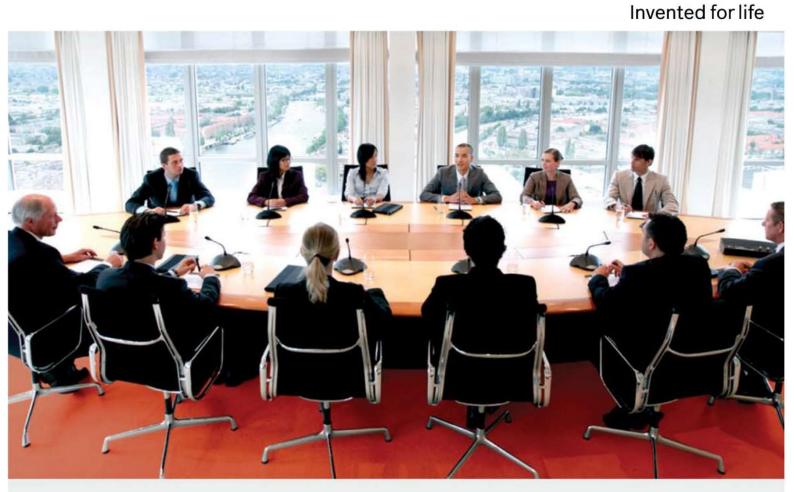



CCS 900 Delivers Excellent speech intelligibility and delegate management



The ideal conference solution...

An all-in-one compact system

Bosch introduces this compact but advanced CCS 900 Ultro Conference System.

Designed and developed by Bosch experts in Europe, the system makes it extremely easy to manage meetings and is ideal for small- to medium-scale meeting areas, such as town council, local government office and any business meeting room. The new design complements any interior, from new, ultra-modern buildings or traditional structures. It delivers Bosch's high quality with improved acoustical characteristics.

The daisy-chained system has an intuitive interface and is fast and easy to install. The system can easily integrate with external equipment like a wireless microphones, a public address system to allow the audience to listen to the discussion, a telephone coupler unit for tele conference or language interpretation distribution.




Product Specifications

CCS-DS - short microphone CCS-DL - long microphone



- Compact, attractive delegate unit
- Enables delegates to speak and listen to the proceedings
- Patent-pending "Possible-To-Speak" indicator
- Loudspeaker/headphones allow monitoring
- Microphone with flexible stem and red ring light indicator for active microphone
- Two headphone sockets with built-in volume control
- Simple operation; one touch activates the microphone
- Length of mic CCD-DS 313mm and CCS-DL 488mm
- 2m connection cable with 7-pin moulded male Din connector





- Incorporates all features of delegate unit (except "Possible-To-Speak" indicator)
- Priority feature mutes all active delegate microphones
- Attention tone for chairman unit (chairman priority function)
- Microphone with flexible stem and red ring light indicator for active microphone
- Length of mic CCD-CMS 313mm and CCS-CML 488mm

CCS-CU - Control Unit (Basic)
CCS-CUD - Control Unit with AFS

- Each Control Unit Supplies power for 50 units delegate
- Four selectable microphone operating models
- Incorporates digital acoustic feedback suppression (CCS-CUD)
- Language-independent, back-lit display
- Loudspeaker/headphones allow monitoring
- Interfaces with external equipment
- Customize up to 150 units delegate system
- Telephone coupler interface for tele conferencing

insport & Storage Suitcase



- Rugged suitcase for safe and easy transportation & storage
- Transport and store control unit, and up to six delegate/ chairman units, plus extension cables (CCS SC6)
- Transport and store up to ten delegate/chairman units (CCS SC10)



Installation cable with connector

Cable clamp

- : LBB 3316/00 (100 m cable + 5 pair
- connectors) Extension cables : LBB 3316/05 (5 m)

 - LBB 3316/10 (10 m)
- Cable locking clamps: LBB 4117/00 (set of 25 pieces)
 - : DCN-DISCLM (set of 25 pieces)

Proven innovations

Bosch conference systems offers a long list of remarkable features, like the digital acoustic feedback suppression that has been used for years in Bosch's Conference and Public Address Systems.



The genuine, Bosch-developed technology "Possible-To-Speak" indicator uses a bicolored LED to inform the delegate when the microphone is available to speak.



Data subject to change without notice



